


6TH FLOOR FRAMING PLAN


SCALE 1:100

- TOP OF SLAB IS AT ELEVATION AS SHOWN ON ARCH. DRAWINGS EXCEPT AS GROSSED AND NOTED ON PLAN.
- CONCRETE STRENGTH AT 28 DAYS SHALL BE:
 - FOR WALLS AND COLUMNS SEE SCHEDULE
 - FOR EXIST. SLABS 35 MPa
 - FOR INTERIOR SLABS 35 MPa
 - FOR EXTERIOR SLABS 35 MPa
 - CONCRETE EXPOSED TO ELEMENTS SHALL BE 35 MPa WITH 6% TO BE STRIPPED MK.
- FLOOR SLABS ARE DESIGNED FOR FOLLOWING LOADING CONDITIONS:

S.L.O.	S.L.O.	U.L.L.
STAIRS & BALCONIES	0.50 MPa	4.80 MPa
LOCKERS & STORAGE	1.30 MPa	4.80 MPa
RESIDENTIAL	1.30 MPa	1.9 MPa
TOILETS	1.30 MPa	2.40 MPa
TERRACES	5.0 MPa	4.80 MPa

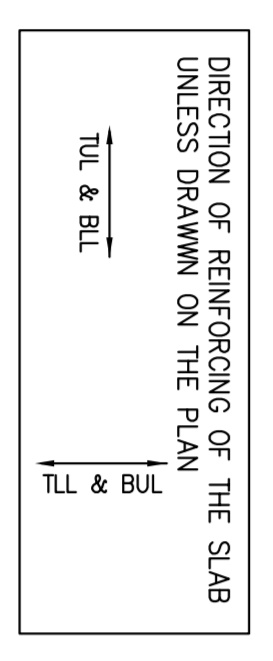

- MINIMUM YIELD STRESS FOR REINFORCING STEEL SHALL BE 400 MPa.
- TEMPERATURE REINFORCING FOR:
 - 200 SLAB IS 1000X.
 - 400 SLAB IS 1000X.
- NO OPENINGS LARGER THAN 300mm x 300mm ARE ALLOWED IN SLAB OTHER THAN THOSE SHOWN ON DRAWINGS.
- SEE TYPICAL DETAILS ON DRAWINGS S-001 TO S-005.
- SEE GENERAL NOTES ON DRAWINGS S-001.
- REFER TO ARCH. DRAWINGS FOR SLOPES OF SLAB.
- FOR COLUMN & WALL SCHEDULE SEE DRAWINGS S-301 TO S-306.
- COMPENSATE BEAM DEPTH AT DOOR OPENINGS WITH ARCH. DRAWINGS.
- EXTEND TEMP. REIN. TO END OF BALCONIES/OVERHANGS.
- TOP BARS TERMINATING AT EDGE OF SLAB TO HAVE 180° HOOK.



ALEXANDRA PARK - BLOCK 11
TORONTO, ONTARIO

FIRST FLOOR ELEV. 80.00m

NO.	ISSUED FOR	DATE
1	ISSUED FOR PERMIT	2014.03.14
2	ISSUED FOR CONSTRUCTION	2014.03.14
3	ISSUED FOR CORRECTIVE WORK	2014.03.14
4	ISSUED FOR CORRECTIVE WORK	2014.03.14
5	ISSUED FOR CORRECTIVE WORK	2014.03.14
6	ISSUED FOR CORRECTIVE WORK	2014.03.14

Jablonsky, Asif and Partners ENGINEERS
 6700 SHEPPARD AVENUE EAST
 SUITE 200
 SCARBOROUGH, ONTARIO M1S 4T7
 TEL: 416-444-2727
 FAX: 416-444-2727
 E-MAIL: info@jablonsky.com