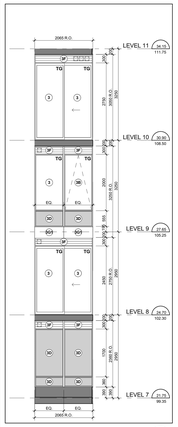

Interior West Elevation - Part 11 (23 / A4-17)
Scale: 1 : 50

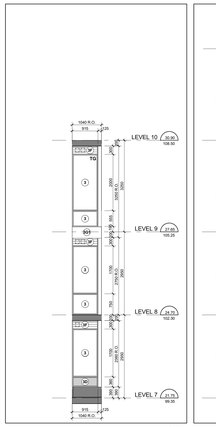

Interior West Elevation - Part 10 (22 / A4-17)
Scale: 1 : 50

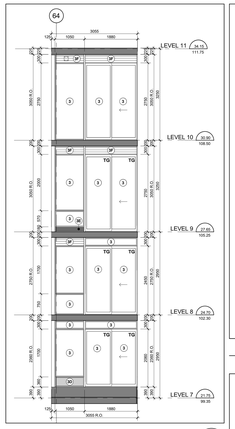

Interior West Elevation - Part 9 (21 / A4-17)
Scale: 1 : 50

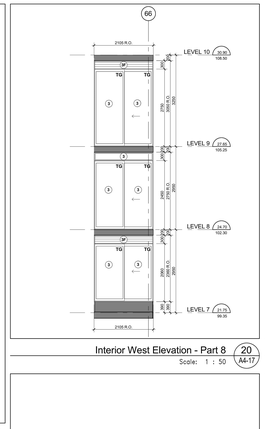

Interior West Elevation - Part 8 (20 / A4-17)
Scale: 1 : 50

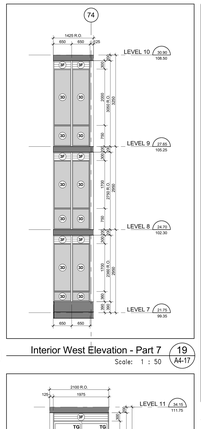

Interior West Elevation - Part 7 (19 / A4-17)
Scale: 1 : 50

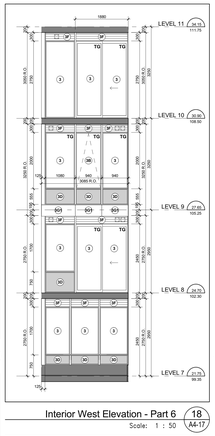

Interior West Elevation - Part 6 (18 / A4-17)
Scale: 1 : 50

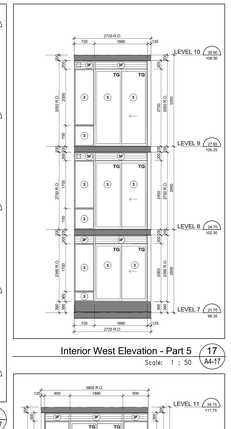

Interior West Elevation - Part 5 (17 / A4-17)
Scale: 1 : 50

Window Schedule Partial Floor Plan - Level 7 (4 / A4-17)
Scale: 1 : 100

TYPICAL WINDOW SCHEDULE NOTES:

1. ADJ.TEMP.CALGARD ALL GLAZING ON ONE OR BOTH SIDES OF WINDOW OPENING
2. CO-ORDINATE GLAZING WITH MECHANICAL DRAWINGS - REFER TO MECHANICAL
3. CO-ORDINATE LOUVER LOCATION WITH MECHANICAL DRAWINGS
4. CO-ORDINATE ELECTRICAL OUTLETS WITH ELECTRICAL DRAWINGS
5. CO-ORDINATE BALCONY/TERRACE ELECTRICAL OUTLETS WITH ELECTRICAL DRAWINGS.

OBC REQUIREMENTS

9.7.2. WINDOW STANDARDS
9.7.2.1. WINDOW STANDARD
(1) WINDOWS SHALL CONFORM TO:
(a) CAN/CGSB-12.1 "TEMPERED GLASS"
(b) THE CANCGSA-MM83.1 "GLASS SELECTION GUIDE TO CSA STANDARD CAN/CSA-A440-00 WINDOWS".
9.7.3. GLASS
9.7.3.1. GLASS STANDARDS
(1) GLASS SHALL CONFORM TO:
(a) CAN/CGSB-12.11 "WIRED GLASS" OR LAMINATED SAFETY GLASS",
(b) CAN/CGSB-12.2 M, "FLAT, CLEAR SHEET GLASS",
(c) CAN/CGSB-12.3 M, "FLAT, TINTED SHEET GLASS",
(d) CAN/CGSB-12.4 M, "HEAT-ABSORBING GLASS",
(f) CAN/CGSB-12.8, "INSULATING GLASS UNITS",
(g) CAN/CGSB-12.9 M, "SPANDREL GLASS, HEAT REFLECTING",
(i) CAN/CGSB-12.1 M, "WIRED SAFETY GLASS", OR
(j) ASTM E2190, "INSULATING GLASS UNIT PERFORMANCE AND EVALUATION"
9.7.3.2. GLASS IN WINDOWS, DOORS AND SKYLIGHTS
(1) GLASS IN WINDOWS, GLAZED DOORS AND SKYLIGHTS SHALL BE DESIGNED IN CONFORMANCE WITH CAN/CGSB-12.20-M, "STRUCTURAL DESIGN OF GLASS FOR BUILDINGS"
9.7.4. SEALING COMPOUND
9.7.4.1. SEALING COMPOUND
(1) SEALING COMPOUND USED TO SEAL THE GLASS COMPONENT OF A FACTORY-SEALED DOUBLE-GLAZED UNIT TO THE GLASS SUPPORT SHALL BE COMPATIBLE WITH THE MATERIAL USED TO EDGE SEAL THE GLASS COMPONENT
9.7.5.4. WINDOWS ABOVE THE SECOND STOREY
(1) WINDOWS IN PUBLIC AREAS THAT EXTEND TO LESS THAN 1 300 MM FROM THE FLOOR AND ARE LOCATED ABOVE THE SECOND STOREY OF A BUILDING SHALL BE PROTECTED BY A GUARD OR BE
(a) PROTECTED BY GUARDS IN ACCORDANCE WITH SUBSECTION 9.8.8., OR
(b) NON-OPENABLE AND DESIGNED TO WITHSTAND THE LATERAL DESIGN LOADS FOR GUARDS AS PROVIDED IN ARTICLES 4.1.5.15. OF DIVISION B.
9.7.6. RESISTANCE TO FORCED ENTRY
9.7.6.1. FORCED ENTRY THROUGH WINDOWS
(1) EXCEPT AS PROVIDED IN SENTENCE (2), EACH PART OF WHICH IS LOCATED WITHIN 2 000 MM OF ADJACENT GROUND LEVEL SHALL CONFORM TO THE REQUIREMENTS FOR RESISTANCE TO FORCED ENTRY AS DESCRIBED IN CLAUSE 10.1.5 OF CAN/CSA-A440-00 "WINDOWS".
9.8.3. GUARDS IN DWELLING UNITS
(1) EXCEPT AS PROVIDED IN SENTENCES (2) AND (3), EVERY SURFACE TO WHICH ACCESS IS PROVIDED FOR OTHER THAN MAINTENANCE PURPOSES, INCLUDING BUT NOT LIMITED TO FLIGHTS OF STEPS AND RAMPS, EXTERIOR LANDINGS, PORCHES, BALCONIES, GALLERIES AND RAISED WALKWAYS, SHALL BE PROTECTED BY A GUARD IF THE SURFACE IS LOCATED ANYWHERE
(a) THERE IS A DIFFERENCE IN ELEVATION OF MORE THAN 600 MM BETWEEN THE WALKING SURFACE AND THE ADJACENT SURFACE, OR
(b) THE ADJACENT SURFACE WITHIN 1.2 M FROM THE WALKING SURFACE HAS A SLOPE OF MORE THAN 1 IN 2
(2) A GUARD IS NOT REQUIRED
(a) AT LOADING DOCKS,
(b) AT FLOOR PITS IN REPAIR GARAGES, OR
(c) WHERE THE SURFACE IS USED FOR MAINTENANCE PURPOSES ONLY.
(3) WHEN AN INTERIOR FLIGHT HAS MORE THAN 3 RISERS OR AN INTERIOR RAMP RISES MORE THAN 600 MM, THE SIDES OF THE STAIR OR RAMP SHALL BE PROTECTED BY A GUARD, FLOOR LEVEL AROUND THE STAIRWELL OR RAMP SHALL BE PROTECTED BY A GUARD ON EACH SIDE THAT IS NOT PROTECTED BY A WALL.
9.8.8.1. HEIGHT OF GUARDS
(1) EXCEPT AS PROVIDED IN SENTENCES (2) TO (4), ALL GUARDS SHALL BE NOT LESS THAN 1 070 MM HIGH.
(2) EXCEPT AS PROVIDED IN SENTENCE (3), GUARDS SHALL BE NOT LESS THAN
(a) EXTERIOR GUARDS SERVING NOT MORE THAN ONE DWELLING UNIT SHALL BE NOT LESS THAN 900 MM HIGH WHERE THE WALKING SURFACE SERVED BY THE GUARD IS NOT MORE THAN 1 800 MM ABOVE THE FINISHED GROUND LEVEL
(b) EXCEPT AS PROVIDED IN (a), 1 000 MM HIGH WHERE THE HEIGHT OF GUARDS IS NOT MORE THAN 1 800 MM HIGH,
(c) THE HEIGHT OF GUARDS FOR FLIGHTS OF STEPS SHALL BE MEASURED VERTICALLY FROM A LINE DRAWN THROUGH THE LEADING EDGE OF TREADS BY THE GUARD.
9.8.8.7. GLASS IN GUARDS
(1) GLASS IN GUARDS SHALL BE
(a) SAFETY GLASS OF THE LAMINATED OR TEMPERED TYPE CONFORMING TO CAN/CGSB-12.1-M, "TEMPERED OR LAMINATED SAFETY GLASS", OR
(b) WIRED GLASS CONFORMING TO CAN/CGSB-12.11-M, "WIRED SAFETY GLASS".
12.3.1.11. WINDOWS AND GLAZING
(2) EXCEPT AS PROVIDED IN SENTENCES (3) AND (5), WINDOWS AND ALL GLAZING THAT SEPARATES HEATED SPACE FROM UNHEATED SPACE OR THE EXTERIOR SHALL CONFORM TO ARTICLES 12.3.2.8. AND 12.3.2.9.
(3) EXCEPT AS PROVIDED IN SENTENCE (5), THE TOTAL AREA OF ALL GLAZING, INCLUDING GLAZING FOR DOORS AND SKYLIGHTS, THAT SEPARATES HEATED SPACE FROM UNHEATED SPACE OR THE EXTERIOR SHALL NOT EXCEED 25 PER CENT OF THE FLOOR AREA OF THE STOREY SERVED BY THE GLAZED AREAS AND SHALL NOT EXCEED 40 PER CENT OF THE TOTAL AREA OF THE WALLS OF THAT STOREY THAT SEPARATE HEATED SPACE FROM UNHEATED SPACE OR THE EXTERIOR, WHERE THE AREA OF WALLS IS THE AREA OF THE OPAQUE PORTION OF THE WALL AS CALCULATED AS ITS PROJECTED AREA ON A VERTICAL PLANE.
(4) EXCEPT AS PROVIDED IN SENTENCE (5), THE AREA OF GLAZING THAT CONTAINS CLEAR GLASS OR TINTED GLASS OTHER THAN SOLAR HEAT GAIN TYPE SHALL BE NOT MORE THAN 2.5 TIMES THE AREA OF SUCH GLAZING FOR THE PURPOSE OF APPLYING SENTENCE (3) MAY BE ASSUMED AS BEING EQUAL TO THE ACTUAL AREA MULTIPLIED BY THE SHADING COEFFICIENT OF THE GLAZING WHERE THE SHADING COEFFICIENT IS LESS THAN 0.9.
(5) EXCEPT AS PROVIDED IN SENTENCE (6), THE AREA OF GLAZING THAT CONTAINS CLEAR GLASS OR TINTED GLASS OTHER THAN SOLAR HEAT GAIN TYPE AND FACES A DIRECTION WITHIN 45° OF DUE SOUTH MAY BE ASSUMED TO BE 50 PERCENT OF ITS ACTUAL AREA MULTIPLIED BY THE SHADING COEFFICIENT OF THE GLAZING WHERE THE BUILDING IS DESIGNED TO BE HEATED WITH A SYSTEM THAT IS CAPABLE OF DISTRIBUTING THE SOLAR HEAT GAIN FROM SUCH GLAZED AREAS THROUGHOUT THE BUILDING FOR THE PURPOSE OF DETERMINING WHETHER OR NOT THE GLAZING IS SHADED IN THE WINTER, THE SHADING SHALL BE CALCULATED USING THE NON-SUN AVERAGED DATA IN
(6) SENTENCE (4) SHALL NOT APPLY WHERE THE BUILDING IS DESIGNED TO BE COOLED UNLESS THE GLAZING DESCRIBED IN SENTENCE (4) IS SHADED IN THE SUMMER WITH EXTERIOR DEVICES. FOR THE PURPOSE OF DETERMINING WHETHER OR NOT THE GLAZING IS SHADED IN THE SUMMER, THE SHADING SHALL BE CALCULATED USING THE NON-SUN AVERAGED DATA IN JUNE.
12.3.2.11. AIR INFILTRATION
(1) WINDOWS THAT SEPARATE HEATED SPACE FROM UNHEATED SPACE OR THE EXTERIOR SHALL BE DESIGNED TO LIMIT THE RATE OF AIR LEAKAGE THROUGH EXTERIOR WINDOWS, CURTAIN WALLS AND DOORS UNDER SPECIFIED PRESSURE DIFFERENCES ACROSS THE SPECIMEN IN CONFORMANCE WITH ASTM E283, "DETERMINING THE RATE OF AIR LEAKAGE THROUGH EXTERIOR WINDOWS, CURTAIN WALLS, AND DOORS UNDER SPECIFIED PRESSURE DIFFERENCES ACROSS THE SPECIMEN"
(2) EXCEPT AS PROVIDED IN SENTENCE (3), WINDOWS AND GLAZING THAT SEPARATE HEATED SPACE FROM UNHEATED SPACE OR THE EXTERIOR SHALL BE DESIGNED TO LIMIT AIR INFILTRATION TO NOT MORE THAN 2.5 L/S FOR EACH SQUARE METRE OF DOOR AREA WHEN TESTED IN CONFORMANCE WITH SENTENCE (1).
(3) WINDOWS AND GLAZING THAT SEPARATE HEATED SPACE FROM UNHEATED SPACE OR THE EXTERIOR SHALL BE DESIGNED TO LIMIT AIR INFILTRATION TO NOT MORE THAN 2.5 L/S FOR EACH SQUARE METRE OF DOOR AREA WHEN TESTED IN CONFORMANCE WITH SENTENCE (1) EXCEPT THAT
(a) WINDOWS AND GLAZING IN DOORS SHALL BE DESIGNED ON ALL EDGES AND PROTECTED WITH A STORM DOOR OR BY AN ENCLOSED UNHEATED SPACE, EXTERIOR SWING TYPE DOOR ASSEMBLIES FOR DWELLING UNITS, INDIVIDUALLY RENTED HOTEL ROOMS AND SUITES SHALL BE DESIGNED TO LIMIT THE RATE OF AIR INFILTRATION TO NOT MORE THAN 5 L/S FOR EACH SQUARE METRE OF DOOR AREA WHEN TESTED IN CONFORMANCE WITH SENTENCE (1),
(b) DOOR ASSEMBLIES OTHER THAN THOSE DESCRIBED IN SENTENCES (2) AND (3), THAT SEPARATE HEATED SPACE FROM UNHEATED SPACE OR THE EXTERIOR SHALL BE DESIGNED TO LIMIT AIR INFILTRATION TO NOT MORE THAN 10 L/S FOR EACH SQUARE METRE OF DOOR AREA WHEN TESTED IN CONFORMANCE WITH SENTENCE (1), AND
(c) WALKING DOORS, TO REGULAR ARMY TYPE DOORS, CONFORMING TO THE REQUIREMENTS OF DWELLING UNIT DOORS, INCLUDING MATERIAL TO REGULAR ARMY TYPE DOORS, LIMITS BETWEEN EXTERIOR AND ANY OTHER LOCATION, WHERE THERE IS A POSSIBILITY OF AIR LEAKAGE INTO HEATED SPACES IN A BUILDING THROUGH THE EXTERIOR WALLS, SUCH AS AT UTILITY PENETRATIONS, SHALL BE SEALED TO LIMIT AIR LEAKAGE IN CONFORMANCE WITH SENTENCE 9.25.3.1.
(7) AIR LEAKAGE BETWEEN HEATED SPACE AND ALLIGNOD ROOF OR ATTIC SPACE CAUSED BY THE PENETRATION OF SERVICES SHALL BE RESTRICTED IN CONFORMANCE WITH THE REQUIREMENTS OF SUBSECTION 9.25.3.



Interior West Elevation - Part 4 (16 / A4-17)
Scale: 1 : 50



East Elevation - Part 3 (11 / A4-17)
Scale: 1 : 50

East Elevation - Part 2 (10 / A4-17)
Scale: 1 : 50



East Elevation - Part 1 (9 / A4-17)
Scale: 1 : 50

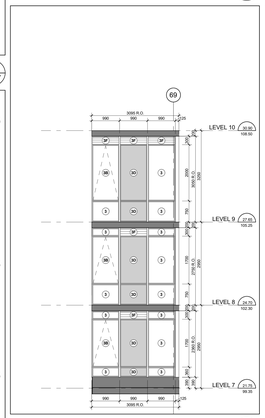

Interior West Elevation - Part 3 (15 / A4-17)
Scale: 1 : 50

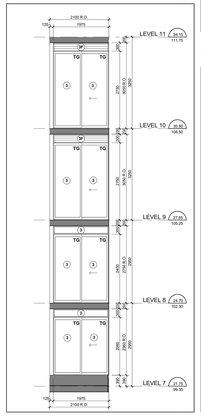

Interior West Elevation - Part 2 (14 / A4-17)
Scale: 1 : 50

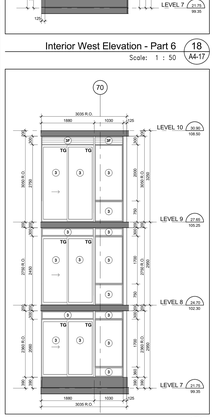

Interior West Elevation - Part 1 (13 / A4-17)
Scale: 1 : 50

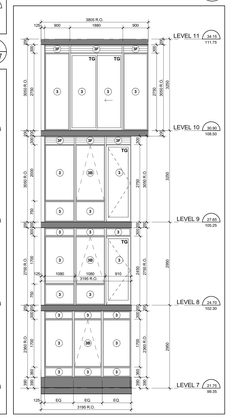

East Elevation - Part 4 (12 / A4-17)
Scale: 1 : 50

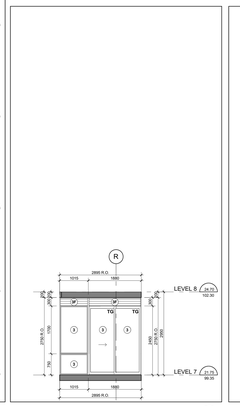

North Elevation - Part 13 (8 / A4-17)
Scale: 1 : 50

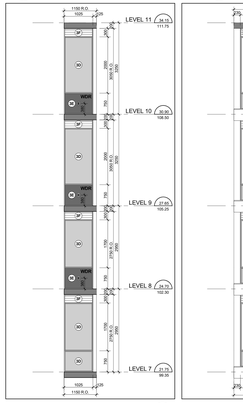

North Elevation - Part 12 (7 / A4-17)
Scale: 1 : 50

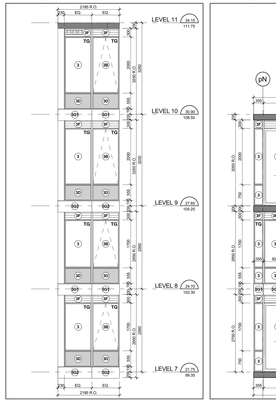

North Elevation - Part 11 (6 / A4-17)
Scale: 1 : 50

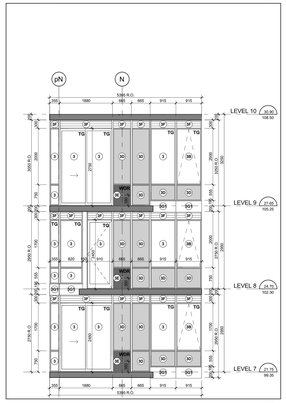

North Elevation - Part 10 (5 / A4-17)
Scale: 1 : 50



Window Schedule Key Plan - Level 7 (2 / A4-17)
NTS

WINDOW SCHEDULE LEGEND

13148 - AQUAVISTA
UPDATED: FEBRUARY 16, 2016

3 PREFINISHED ALUMINUM WINDOW WALL - VISION PANEL
ALUM. COLOUR: EXTERIOR - PPG LC7012-HF DURANAR GREY VELVET; INTERIOR - #1395 DURACRON WHITE
GLASS TYPE: CLEAR INNER & OUTER LITE, GUARDIAN SUNGUARD - SUPERNEUTRAL 8464 ON SURFACE 2

3A PREFINISHED ALUMINUM WINDOW WALL - VISION PANEL FRIT PATTERN
ALUM. COLOUR: EXTERIOR - PPG LC7012-HF DURANAR GREY VELVET; INTERIOR - #1395 DURACRON WHITE
GLASS TYPE: CLEAR INNER & OUTER LITE, GUARDIAN SUNGUARD - SUPERNEUTRAL 8464 ON SURFACE 2; WHITE FRIT SIMM DIAMETER DOTS IN 70% SQUARE PATTERN ON SURFACE 2

3B PREFINISHED ALUMINUM WINDOW WALL - OPERABLE AWNING
ALUM. COLOUR: EXTERIOR - PPG LC7012-HF DURANAR GREY VELVET; INTERIOR - #1395 DURACRON WHITE
GLASS TYPE: CLEAR INNER & OUTER LITE, GUARDIAN SUNGUARD - SUPERNEUTRAL 8464 ON SURFACE 2

3C PREFINISHED ALUMINUM WINDOW WALL - OPERABLE AWNING FRIT PATTERN
ALUM. COLOUR: EXTERIOR - PPG LC7012-HF DURANAR GREY VELVET; INTERIOR - #1395 DURACRON WHITE
GLASS TYPE: CLEAR INNER & OUTER LITE, GUARDIAN SUNGUARD - SUPERNEUTRAL 8464 ON SURFACE 2; WHITE FRIT SIMM DIAMETER DOTS IN 70% SQUARE PATTERN ON SURFACE 2

3D PREFINISHED ALUMINUM WINDOW WALL - GLASS SPANDREL PANEL
ALUM. COLOUR: EXTERIOR - PPG LC7012-HF DURANAR GREY VELVET; INTERIOR - #1395 DURACRON WHITE
GLASS TYPE: CLEAR FLOAT
COLOUR: SOLID FRIT VIRACON SUBDUED GRAY VISO ON SURFACE 2

3E PREFINISHED ALUMINUM WINDOW WALL - METAL SPANDREL PANEL
ALUM. COLOUR: EXTERIOR - PPG LC7012-HF DURANAR GREY VELVET; INTERIOR - #1395 DURACRON WHITE
METAL PANEL: PPG LC7012-HF DURANAR GREY VELVET

3F PREFINISHED ALUMINUM WINDOW WALL - METAL LOUVER
ALUM. COLOUR: EXTERIOR - PPG LC7012-HF DURANAR GREY VELVET; INTERIOR - #1395 DURACRON WHITE
METAL LOUVER: PPG LC7012-HF DURANAR GREY VELVET

3G1 PREFINISHED ALUMINUM WINDOW WALL - METAL SLAB COVER - PROFILE 40x420mm
ALUM. COLOUR: EXTERIOR - PPG LC7012-HF DURANAR GREY VELVET; INTERIOR - #1395 DURACRON WHITE
SLAB COVER: PPG UC1807DSL DURANAR XL STEEL SILVER CITY

3G2 PREFINISHED ALUMINUM WINDOW WALL - METAL SLAB COVER - PROFILE 195x420mm
ALUM. COLOUR: EXTERIOR - PPG LC7012-HF DURANAR GREY VELVET; INTERIOR - #1395 DURACRON WHITE
SLAB COVER: PPG UC1807DSL DURANAR XL STEEL SILVER CITY

3G3 PREFINISHED ALUMINUM WINDOW WALL - METAL SLAB COVER - PROFILE 220x420mm
ALUM. COLOUR: EXTERIOR - PPG LC7012-HF DURANAR GREY VELVET; INTERIOR - #1395 DURACRON WHITE
SLAB COVER: PPG UC1807DSL DURANAR XL STEEL SILVER CITY

3H PREFINISHED ALUMINUM WINDOW WALL - OPERABLE WINDOW - VISION PANEL
ALUM. COLOUR: EXTERIOR - PPG LC7012-HF DURANAR GREY VELVET; INTERIOR - #1395 DURACRON WHITE
GLASS TYPE: CLEAR INNER & OUTER LITE, GUARDIAN SUNGUARD - SUPERNEUTRAL 8464 ON SURFACE 2

3J PREFINISHED ALUMINUM WINDOW WALL - OPERABLE WINDOW - GLASS SPANDREL PANEL
ALUM. COLOUR: EXTERIOR - PPG LC7012-HF DURANAR GREY VELVET; INTERIOR - #1395 DURACRON WHITE
GLASS TYPE: CLEAR FLOAT
COLOUR: SOLID FRIT VIRACON SUBDUED GRAY VISO ON SURFACE 2

3K PREFINISHED ALUMINUM WINDOW WALL - OPERABLE WINDOW - METAL LOUVER
ALUM. COLOUR: EXTERIOR - PPG LC7012-HF DURANAR GREY VELVET; INTERIOR - #1395 DURACRON WHITE
METAL LOUVER: PPG LC7012-HF DURANAR GREY VELVET

4 PREFINISHED STOREFRONT CURTAINWALL - VISION PANEL (GROUND FLOOR)
ALUM. COLOUR: EXTERIOR - PPG LC7012-HF DURANAR GREY VELVET; INTERIOR - PPG LC7012-HF DURANAR GREY VELVET
GLASS TYPE: CLEAR INNER & OUTER LITE, GUARDIAN SUNGUARD - SUPERNEUTRAL 8464 ON SURFACE 2

4A PREFINISHED STOREFRONT CURTAINWALL - VISION PANEL FRIT PATTERN (GROUND FLOOR)
ALUM. COLOUR: EXTERIOR - PPG LC7012-HF DURANAR GREY VELVET; INTERIOR - PPG LC7012-HF DURANAR GREY VELVET
GLASS TYPE: CLEAR INNER & OUTER LITE, GUARDIAN SUNGUARD - SUPERNEUTRAL 8464 ON SURFACE 2; WHITE FRIT SIMM DIAMETER DOTS IN 70% SQUARE PATTERN ON SURFACE 2

4B PREFINISHED STOREFRONT CURTAINWALL - SHADOW BOX (GROUND FLOOR)
ALUM. COLOUR: EXTERIOR - PPG LC7012-HF DURANAR GREY VELVET; INTERIOR - PPG LC7012-HF DURANAR GREY VELVET
GLASS TYPE: CLEAR INNER & OUTER LITE, GUARDIAN SUNGUARD - SUPERNEUTRAL 8464 ON SURFACE 2
COLOUR: WHITE COLOUR PAINT ON ALUMINUM PAN BEHIND SURFACE 4

4C PREFINISHED STOREFRONT CURTAINWALL - GLASS SPANDREL PANEL (GROUND FLOOR)
ALUM. COLOUR: EXTERIOR - PPG LC7012-HF DURANAR GREY VELVET; INTERIOR - PPG LC7012-HF DURANAR GREY VELVET
GLASS TYPE: CLEAR INNER & OUTER LITE, GUARDIAN SUNGUARD - SUPERNEUTRAL 8464 ON SURFACE 2
COLOUR: SOLID FRIT GREY VELVET ON SURFACE 4

4D PREFINISHED STOREFRONT CURTAINWALL - METAL LOUVER (GROUND FLOOR)
ALUM. COLOUR: EXTERIOR - PPG LC7012-HF DURANAR GREY VELVET; INTERIOR - PPG LC7012-HF DURANAR GREY VELVET
METAL LOUVER: PPG LC7012-HF DURANAR GREY VELVET

4E PREFINISHED STOREFRONT CURTAINWALL - METAL SPANDREL PANEL (GROUND FLOOR)
ALUM. COLOUR: EXTERIOR - PPG LC7012-HF DURANAR GREY VELVET; INTERIOR - PPG LC7012-HF DURANAR GREY VELVET
METAL PANEL: PPG LC7012-HF DURANAR GREY VELVET

4F PREFINISHED STOREFRONT CURTAINWALL - VISION PANEL FRIT PATTERN (GROUND FLOOR)
ALUM. COLOUR: EXTERIOR - PPG LC7012-HF DURANAR GREY VELVET; INTERIOR - PPG LC7012-HF DURANAR GREY VELVET
GLASS TYPE: CLEAR INNER & OUTER LITE, GUARDIAN SUNGUARD - SUPERNEUTRAL 8464 ON SURFACE 3 GREY VELVET HORIZONTAL FRIT PATTERN ON SURFACE 2

LEGEND

BBQ	BBQ GAS CONNECTION - REFER TO MECHANICAL DRAWINGS
NFHB	NON FREEZE HOSE BIBB - REFER TO MECHANICAL DRAWINGS
WDR	WEATHERPROOF DUPLEX RECEPTACLE - REFER TO ELECTRICAL DRAWINGS
LF	LIGHT FIXTURE - REFER TO ELECTRICAL DRAWINGS
TG	TEMPERED GLASS

Typical Window Schedule Notes (3 / A4-17)
NTS

Window Schedule Legend (1 / A4-17)
NTS

Contractor Must Check And Verify All Dimensions On The Job.
Do Not Scale The Drawings.
All Drawings, Specifications And Related Documents Are The Copyright Of The Architect And Must Be Returned Upon Request.
Reproduction Of Drawings, Specifications And Related Documents In Part Or Whole Is Forbidden Without The Architects Written Permission.
This Drawing Is Not To Be Used For Construction Until Signed By The Architect.

Date: November 4, 2016

TORONTO ASSOCIATION OF ARCHITECTS
"ISSUED FOR CONSTRUCTION"
"STAMP MUST BE SIGNED TO BE VALID"

Construction

KIRKOR ARCHITECTS + PLANNERS
20 Martin Ross Avenue, Toronto, Ontario, M3J 2K8
TEL 416.665.4065, FAX 416.665.7234, www.kirkorarchitects.com

No.	Revision	Date
2	Construction	Nov. 4, 2016
1	Tender	Oct. 19, 2015
No.	Issued For	Date

AQUAVISTA
AT BAYSIDE TORONTO

Drawing Title
Window Schedule - Level 7 - North, East & Interior West Elevation

Project
Hines TRIDEL
AQUAVISTA
Block 3 - R3 & R4
263 Queens Quay East
Toronto, ON

Scale: As indicated
Drawn by: E.V. / M.N.
Checked by: C.A.
Project No.: 13148
Date: November 4, 2016
Drawing No.: A4-17

Plot Date: 11/2/2016 11:58:31 AM File Path: C:\Users\vdevoch\Documents\ACVE21 2015 WORKING FILES\13148P2D-Model~Building R3-R4_vdevoch.rvt