

6 202 0356 61 11  
NIC L 600mA-DC 40W  
GI 1 MTK 120V


6 202 0356 61 21  
NIC L 600mA-DC 40W  
GI 1 MTK 277V

6 202 0358 61 11  
NIC L 700mA-DC 40W  
GI 1 MTK 120V

6 202 0358 61 21  
NIC L 700mA-DC 40W  
GI 1 MTK 277V

NIC

MS

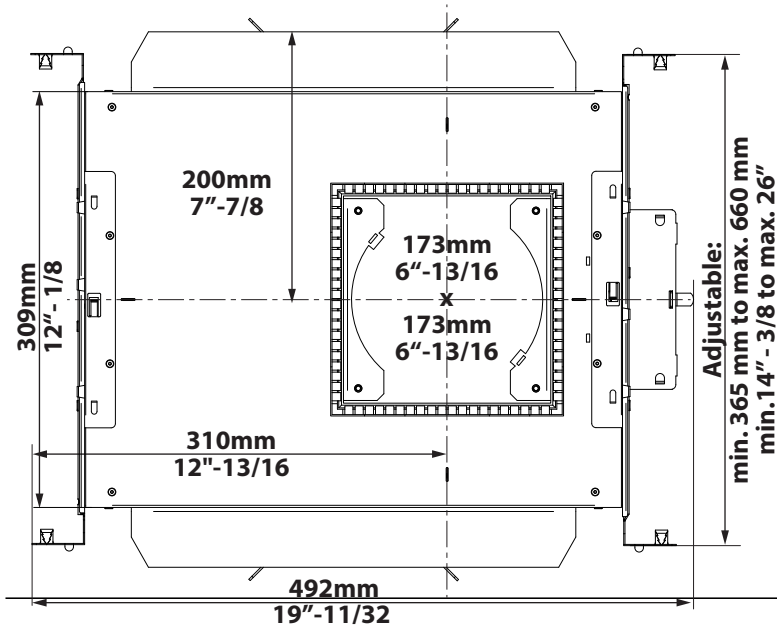

**APPLICATION**

For use in new construction applications where no insulating material can be present. DeltaLight Grid In 1 Mounting Kit HP fit to plasterframe Suitable for damp locations.

**CEILING THICKNESS**

For 5/8" ceiling standard

**LED POWER SUPPLY**

Electronic power supply for 120V or 277V primary and 600mA or 700mA current controlled class 2 secondary LED power supply accessible from below ceiling



**CONNECTOR**

Plasterframe and trim connection through snap-in connector

**DIMENSIONS**

Height: 130mm = 5"-1/8  
Length: 492mm = 19"- 11/32  
Width: 309mm = 12"-1/8

Ceiling Cut out: 173mm x 173mm = 6"-13/16 x 6"-13/16

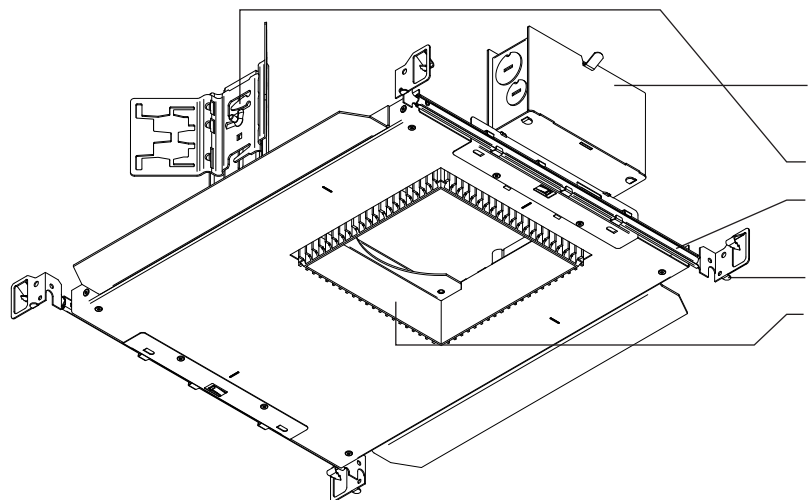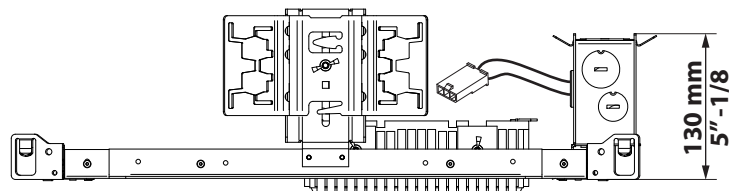

**SPECIFICATION FEATURES**

- Galvanized steel construction
- Junction box with snap-in internal cover and screw-on external cover.
- Through circuit wiring with 4 in, 4 out #12 wire.
- Preinstalled butterfly brackets, adjustable in height 2" - 3/4.
- Standard Bar Hangers allow plasterframe to be positioned and locked by squeezing lock tabs with pliers. Standard Bar Hangers expand to max 26" - reduce to min 14" - 3/8.
- Bar hanger foot aligns to bottom of construction joist
- Snap-in connector female part

**COMPATIBLE FINISHING SECTION**

	COMPATIBLE FINISHING SECTION	PLASTERFRAME
CRI80	GRID IN TRIMLESS 1 HP 303027 6 202 684 20122	6 202 0356 61 11 / 6 202 0356 61 21
	GRID IN TRIMLESS 1 HP 303050 6 202 684 20132	6 202 0356 61 11 / 6 202 0356 61 21
	GRID IN TRIMLESS 1 HP 303027-9 6 202 684 209122	6 202 0358 61 11 / 6 202 0358 61 21
CRI90	GRID IN TRIMLESS 1 HP 303050-9 6 202 684 209132	6 202 0358 61 11 / 6 202 0358 61 21

**ORDER INFORMATION**

	Range	Installation type	Lamp Source	Opening	Voltage 1 - 120V 2 - 277V 3 - 120-277V	Mounting Option 0 - No bar hangers 1 - Bar hangers standard
CRI80	6 202	03 - NIC Plasterframe L	56 - 600mA-DC 40W UNV	61 - GI 1 MTK	1 - 120V	1 - Bar hangers standard
	6 202	03 - NIC Plasterframe L	56 - 600mA-DC 40W UNV	61 - GI 1 MTK	2 - 277V	1 - Bar hangers standard
CRI90	6 202	03 - NIC Plasterframe L	58 - 700mA-DC 40W UNV	61 - GI 1 MTK	1 - 120V	1 - Bar hangers standard
	6 202	03 - NIC Plasterframe L	58 - 700mA-DC 40W UNV	61 - GI 1 MTK	2 - 277V	1 - Bar hangers standard