

Clean Touch Steel 24" Whole Bean Coffee System

CVA 6800



Whole Bean Coffee System

CVA 6800



CVA 6800

Features:

- M Touch innovative and revolutionary controls are both easy to operate and navigate. An intuitive swipe of the screen will quickly lead you to your desired selection
- OneTouch function prepares two hot beverages in succession when pressing the button twice
- OneTouch for Two operation dispenses two cappuccino or latte macchiato drinks, coffee or espresso simultaneously
- CupSensor recognizes the rim of the cup and alters the spout accordingly
- EasyClick Milk System simply clicks the milk reservoir into and out of place at the front of the machine
- Dishwasher-safe milk flask
- Automatic rinsing and cleaning programs
- Up to 10 user profiles
- The coffee pot function allows up to eight cups of coffee to be brewed at one time
- BrilliantLight
- Timer function
- Ground coffee chute for whole bean bypass
- Removable brew unit for easy cleaning
- Removable water tank

SPECIFICATIONS


CVA 6800	
Overall Unit Width - Excluding Fascia Dimension	21 ⁷ / ₁₆ " (545 mm)
Overall Unit Height - Excluding Fascia Dimension	17 ¹ / ₂ " (445 mm)
Overall Unit Depth - Excluding Fascia Dimension	18 ¹ / ₈ " (460 mm)
Door Depth When Open	23 ⁷ / ₁₆ " (594 mm)
Overall Fascia Dimensions	23 ⁷ / ₁₆ " (595 mm) W x 17 ¹⁵ / ₁₆ " (455.5 mm) H x 1 ¹³ / ₁₆ " (22 mm) D
Built-In	
Minimum Cabinet Width	22 ¹ / ₁₆ " (560 mm)
Minimum Cabinet Depth	21 ⁵ / ₈ " (550 mm)
Minimum Cabinet Height	17 ¹¹ / ₁₆ " (450 mm)
Minimum Base Support	62 lbs (28,2 kg)
Additional Cut-outs Required	Venting: 19 ¹¹ / ₁₆ " (500 mm) x 1 ⁹ / ₁₆ " (40 mm) or 31" in ² (200 cm ²)
Electrical	
Electrical Requirements	120V, 60Hz, 15A
Power Cord	Molded NEMA 5-15A plug, 6 ft (1.8 m)
Shipping	
Shipping Weight	70 lbs (32 kg)
Shipping Dimensions	23 ⁵ / ₈ " W x 22 ¹ / ₁₆ " H x 26" L
Support	
Call Miele	800.565.6435
Miele Website	www.miele.ca

Whole Bean Coffee System CVA 6800




PRODUCT VIEWS

Isometric View

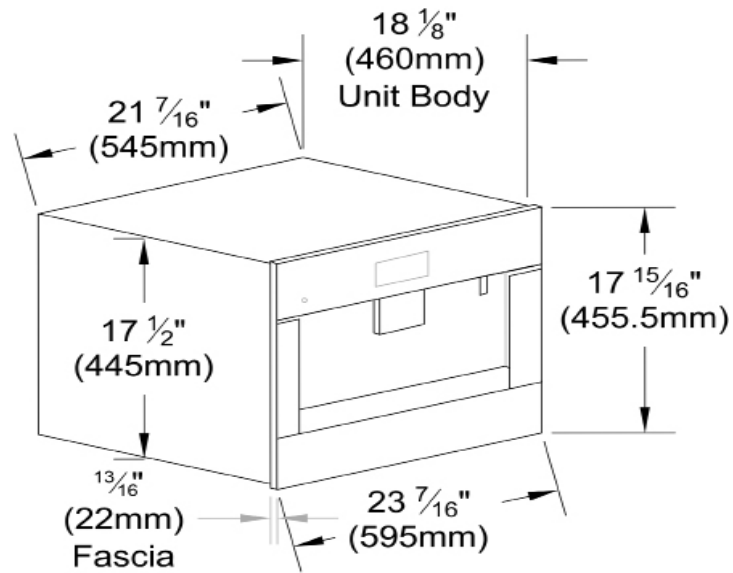

Top View, Door Open

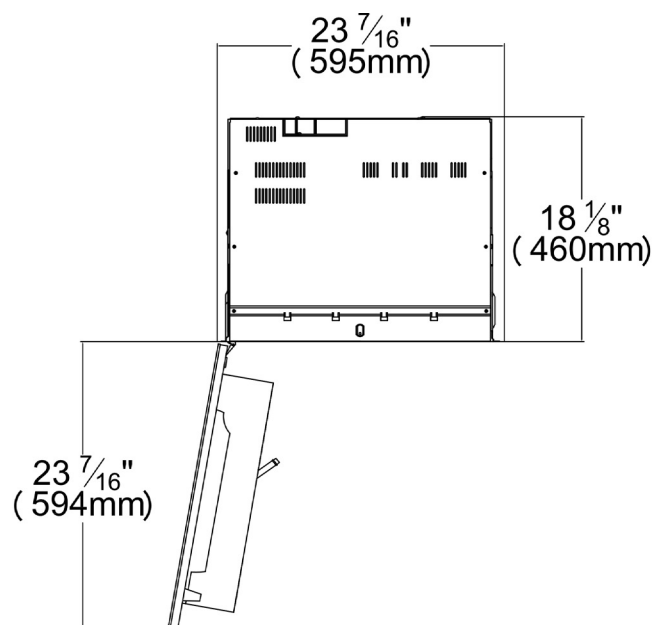


Whole Bean Coffee System CVA 6800




PRODUCT VIEWS

Front View

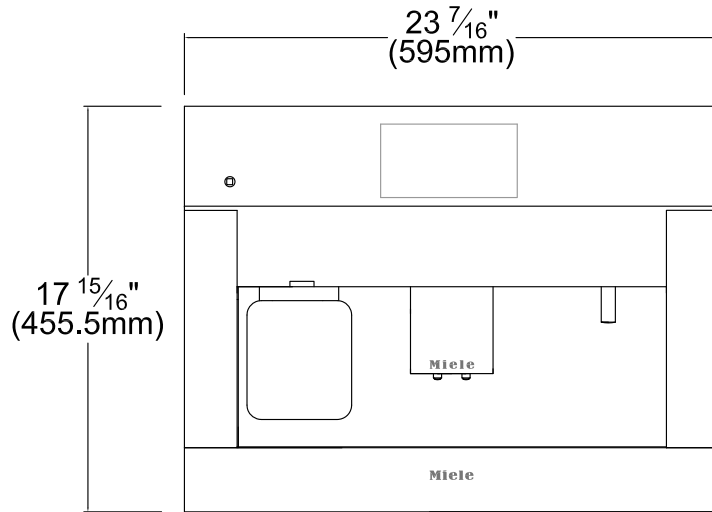

Side View

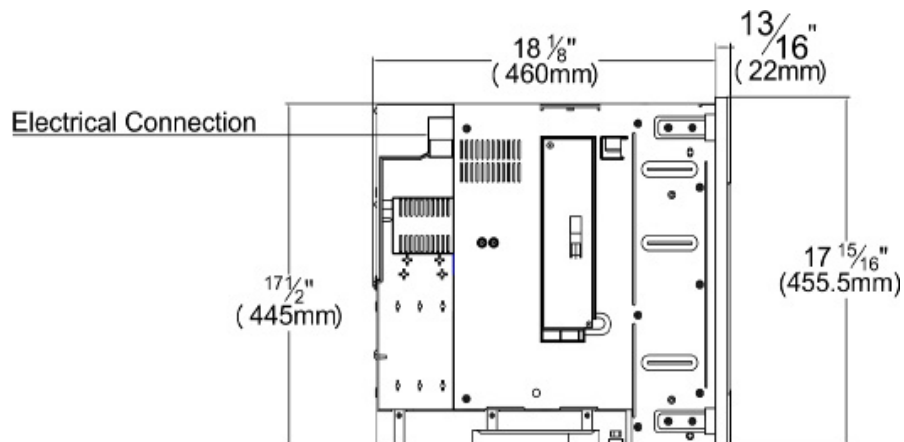


Whole Bean Coffee System CVA 6800




PRODUCT VIEWS



Rear View

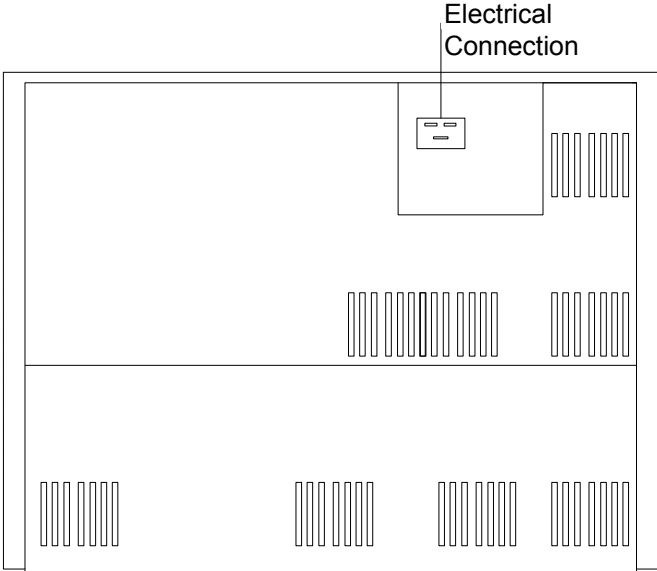

INSTALLATION SPECIFICATIONS Cutout Dimensions

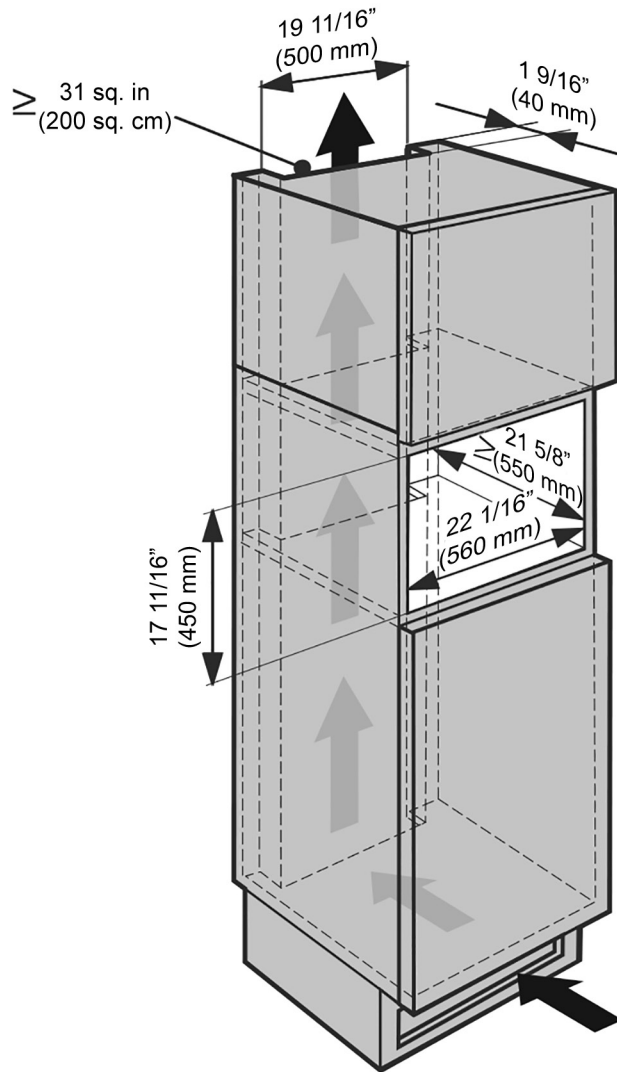


Lower gap adjustment detail when solo installed.
(Adjusted by feet of CVA unit.)

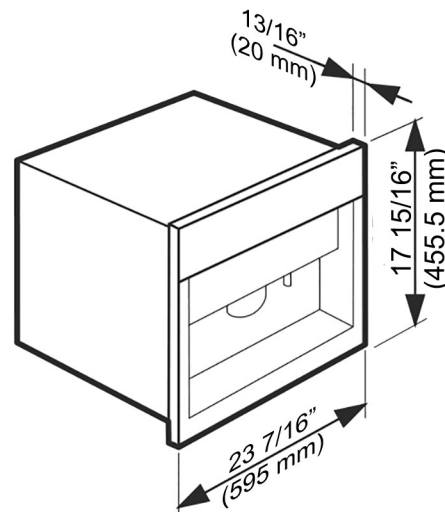


PLEASE NOTE: Condensation water can damage the coffee system or surrounding cabinets. The specified ventilation cross-sections absolutely must be observed.

INSTALLATION SPECIFICATIONS

Ventilation Requirements

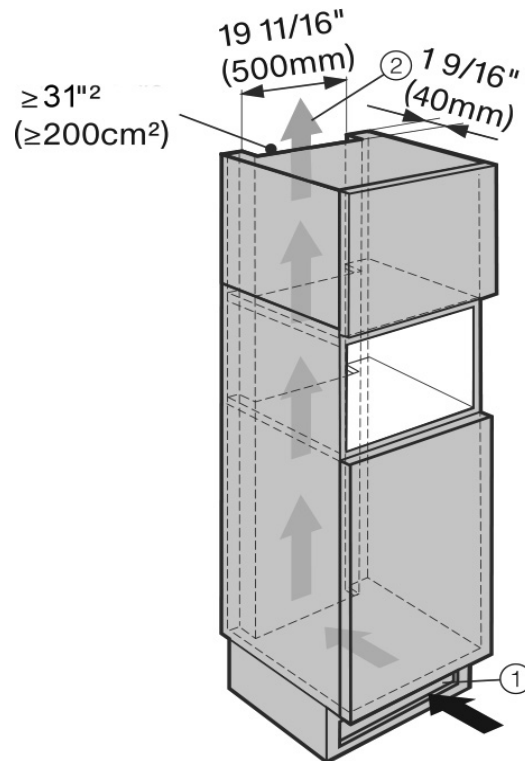

Air intake ① occurs via the plinth at the bottom of the appliance and the air escapes at the top ② at the rear of the surrounding cabinets.

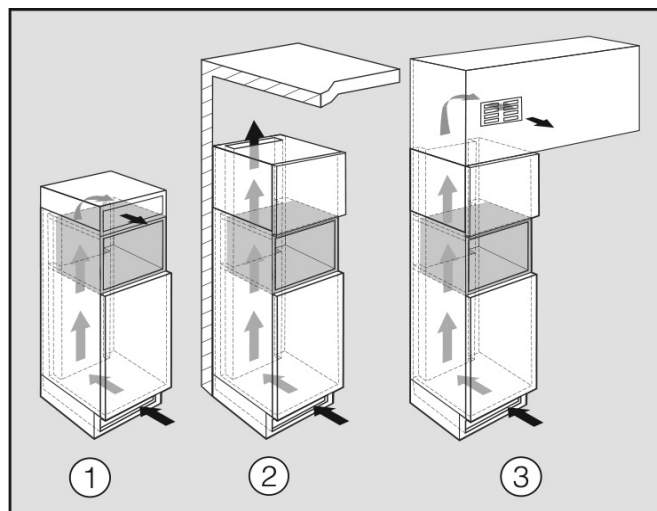


- ① directly above the coffee system with a ventilation grille (free airflow of at least 31 square inches / 200 cm²)
- ② between the surrounding cabinets and the ceiling
- ③ through a suspended ceiling

PLEASE NOTE: Condensation water can damage the coffee system or surrounding cabinets. The specified ventilation cross-sections absolutely must be observed.

Whole Bean Coffee System CVA 6800



INSTALLATION SPECIFICATIONS With Warming Drawer

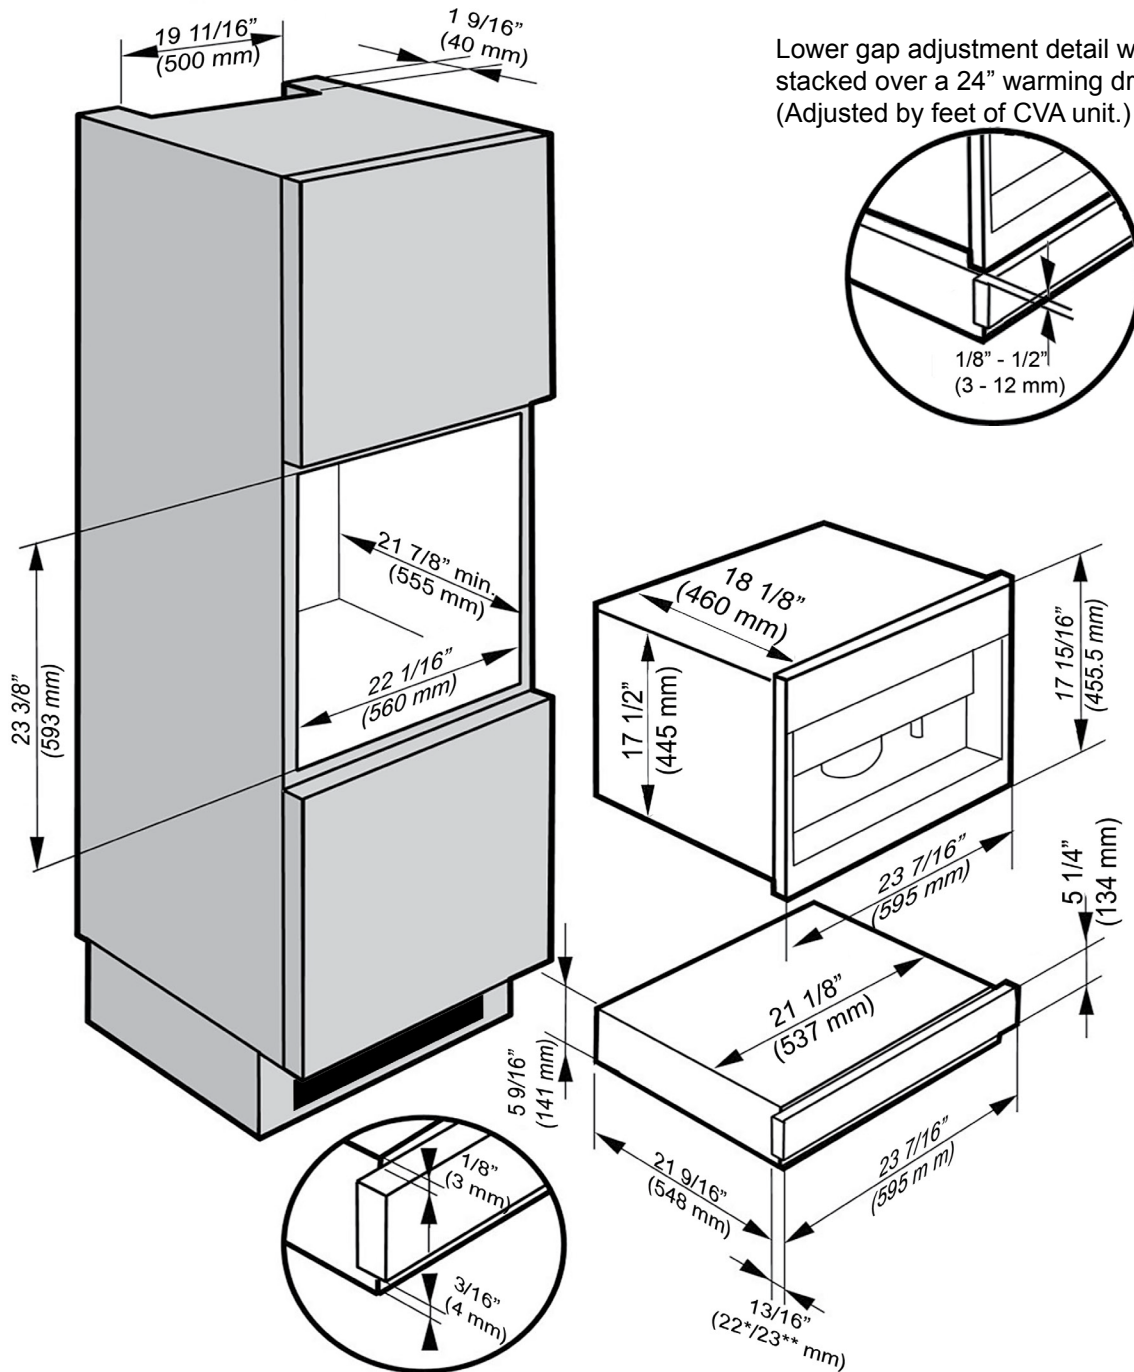

PLEASE NOTE: Condensation water can damage the coffee system or surrounding cabinets. The specified ventilation cross-sections absolutely must be observed.