VFCU DUCT SIZE		
DESIGNATION	L/s (CFM)	DUCT SIZE
A	94 (200CFM)	200x200
B	188 (400 CFM)	250x200
C	282 (600 CFM)	400x200
D	376 (800 CFM)	400x250
E	470 (1,000 CFM)	450x250
F	564 (1,200 CFM)	500x250



1 150ø DUCT C/W 25MM INSULATION (TYP. 4)

EXHAUST LOUVRE SECTION B-B. NTS

SEE UNIT 9 ON DRAWING M-6 FOR DETAIL

SEE M-1 FOR CONTINUATION

REFER TO DWG M-9 FOR ACOUSTIC NOTES

GENERAL NOTES:

1) CONTRACTOR SHALL CO-ORDINATE ARCHITECTURAL, STRUCTURAL, LIGHTING, HVAC, SPRINKLER DRAWINGS TO AVOID AREAS OF CONFLICT AND TO MAINTAIN CEILING HEIGHTS.

2) CONTRACTOR SHALL REPORT ALL DISCREPANCIES AND AREA OF CONFLICTS TO THE ENGINEER PRIOR TO WORK BEGINS.

3) PROVIDE EXPANSION CHAMBERS FOR ALL KITCHEN SINKS.

4) SEE INSTALLATION DETAILS DRAWING FOR WASHER DOM. H4C WATER, SANITARY CONNECTION DETAILS.

5) SUPPLY AND INSTALL COMPLETE DOMESTIC HOT AND COLD WATER LINES, SANITARY AND VENT LINES TO EACH FIXTURE /EQUIPMENT INCLUDING WATER CLOSETS, LAVATORIES, BATHS, SHOWERS, KITCHEN SINK, WASHING MACHINES, DISHWASHERS, AND FLOOR DRAINS. KITCHEN SINK, LAVATORIES, WATER CLOSETS AND WASHING MACHINE TO BE C/W LOCALIZED SHUT-OFF VALVES.

6) ALL VENT PIPE INSTALLATION TO COMPLY WITH PLUMBING CODES.

7) FOR D.H.4C. W. RISER SIZES, REFER TO RISER DIAGRAM

8) FIRE DAMPERS ARE REQUIRED TO BE LISTED AND ARE TO HAVE FIRE PROTECTION RATING OF THE PENETRATED FIRE SEPARATION.

9) THE PIPING PENETRATING THE VARIOUS FIRE SEPARATION IS REQUIRED TO BE FIRESTOPPED WITH A LISTED FIRESTOPPING MATERIAL IN ACCORDANCE WITH OBC ARTICLE 3.1.9.1

10) THE FIRE HOSE CABINET THAT ARE RECESSED INTO THE EXIT STAIR SHAFTS ARE REQUIRED TO BE SEPARATED FROM THE EXIT STAIR BY A 2 HR. FIRE SEPARATION.

11) NO FLEXIBLE DUCT SHALL BE USED FOR ANY IN-SUITE DUCTWORK.

12) PROVIDE 25MM EXTERNAL INSULATION TO ENTIRE FRESH AIR DUCT FROM EXTERIOR WALL TO ERV FAN COIL UNIT.

13) DRYER EXHAUST DUCT SHALL BE SMOOTH AND CORROSION-RESISTANT MATERIAL (FLEXIBLE CONNECTION IS NOT ACCEPTABLE.)

CLEAR FLOOR TO UNDERSLAB = 4050mm
CLEAR PRODUCT= 3000mm
COMPLETE DROP CEILING =1000mm FOR DUCT/PIPES
ROOF DRAINS 4 TERRACE DRAINS FROM 2/F

NOTES:

1. 3,100x2,000 (6.2 M², 68 FT²) EXHAUST AIR SHAFT FOR P-1 & P-2 LEVEL C/W GRATE BY OTHERS.
2. 5,200x1,700 (8.84 M², 95 FT²) AIR SHAFT FOR GENERATOR INTAKE & EXHAUST C/W GRATE BY OTHERS.
3. 2,250x1,300 (2.93 M², 31.5 FT²) FRESH AIR INTAKE SHAFT FOR P-2 LEVEL C/W GRATE BY OTHERS.
4. 1,650x480 F/A DUCT FROM BELOW C/W FIRE DAMPER AT SLAB.
5. 1,300x400 F/A DUCT UP TO SOUTH SHAFT A C/W FIRE DAMPER AT SLAB.
6. 700x350 STAIR PRESSURIZATION DUCT DOWN c/w 2HR FIRE RATED ENCLOSURE. ENCLOSURE BY OTHERS.
7. MOTORIZED DOOR TO BE CONNECTED TO FIRE ALARM SYSTEM BY DIV.16.
8. 1,000x750 WEATHERPROOF INTAKE LOUVRE c/w BIRDSCREEN.
9. 700x350 STAIR RELIEF DUCT FROM BELOW c/w 2Hr FIRE RATED ENCLOSURE. ENCLOSURE BY OTHERS.
10. 600x700 WEATHERPROOF EXHAUST LOUVRE C/W BIRDSCREEN.
11. 2HR FIRE RATED ENCLOSURE BY OTHERS.
12. 400x300 RETURN AIR DUCT ABOVE CEILING C/W ACOUSTIC INSULATION AND WIRE MESH AT OPEN ENDS.
13. 200ø EXHAUST AIR DUCT. (PROVIDE INSULATION 1.6m AWAY FROM EXTERIOR WALL)
14. 150ø EXHAUST AIR DUCT.
15. 25MM EXTERNAL INSULATION 1.6M FROM EXTERIOR WALL. (PROVIDE INSULATION 1.6m AWAY FROM EXTERIOR WALL)
16. MOTORIZED DAMPER BY DIV.15 TO BE CONNECTED TO FIRE ALARM SYSTEM BY DIV.16.
17. 400x200 WEATHERPROOF EXHAUST LOUVRE C/W BIRDSCREEN.
18. 800x300 RETURN AIR DUCT ABOVE CEILING C/W ACOUSTIC INSULATION AND WIRE MESH AT OPEN ENDS.
19. 500x400 F/A DUCT UP TO SOUTH SHAFT B C/W FIRE DAMPER AT SLAB.
20. 900x750 WEATHERPROOF EXHAUST LOUVRE c/w BIRDSCREEN.
21. 100x150 DUCT.
22. 300ø GENERATOR FLUE EXHAUST FROM GENERATOR BELOW, AND DISCHARGE AT 2,150 MM ABOVE GRADE C/W RAIN CAP.
23. SLEEVE THRU BEAM.
24. 500x150 DUCT.
25. 450x150 DUCT.
26. 150ø KITCHEN/DRYER/W/R/FCU INTAKE/FCU EXHAUST DUCT. (TYPICAL UNLESS OTHERWISE NOTED)
27. CONTINUOUS LINEAR SLOT DIFFUSER BY THIS CONTRACTOR.
28. WIRE MESH TO SUIT FAN.
29. USE ACOUSTIC FLEXIBLE DUCT IN THEATRE.
30. DUCT SHALL BE C/W 25MM EXTERNAL INSULATION & JACKET IN ANY UNHEATED AREAS.
31. (2) 200ø AND (1) 150ø DUCTS RUNNING BELOW THE 550x300 EF-19 EXHAUST DUCT.

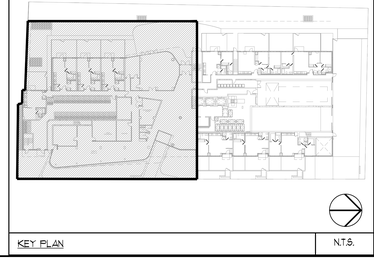

KEY PLAN N.T.S.

LEGEND MECHANICAL

SYMBOL	DESCRIPTION
	SUPPLY AIR DIFFUSER
	SUPPLY AIR TROFFER
	LINEAR SUPPLY DIFFUSER
T	THERMOSTAT
S	FAN SWITCH
	RETURN AIR GRILLE
	EXHAUST AIR GRILLE
	SUPPLY DUCT UP
	SUPPLY DUCT DOWN
	RETURN DUCT UP
	RETURN DUCT DOWN
	EXHAUST DUCT UP
	EXHAUST DUCT DOWN
FD	FIRE DAMPER
BD	BALANCING DAMPER
MD	MOTORIZED DAMPER
MFD	MOTORIZED FIRE DAMPER
BDD	BACKDRAFT DAMPER
OBD	OPPOSED BLADE VOLUME CONTROL DAMPER C/W LOCKING QUADRANT
	TURNING VANES
	FLEXIBLE CONNECTION
	ACOUSTIC INSULATION
	TYPE OF EQUIPMENT EQUIPMENT IDENTIFICATION
	TYPE OF DIFFUSER OR GRILLE GRILLE SIZE OR DIFFUSER NECK SIZE AIRFLOW (CFM OR L/S)
	STARTER (3 PHASE / 1PHASE)
S	IN-SUITE ERV MASTER SWITCH
S	FAN SWITCH / IN-SUITE ERV OVERRIDE BUTTON
CO	CO SENSOR
	GAS LINE
	GAS METER
	GAS COCK
	PRESSURE REDUCING VALVE
	SANITARY ABOVE GRADE
	SANITARY BELOW GRADE
	STORM ABOVE GRADE
	STORM BELOW GRADE
	DOMESTIC COLD WATER
	DOMESTIC HOT WATER
	DOMESTIC HOT WATER RECIRCULATION
	SANITARY VENT
	WATER METER
FD	FLOOR DRAIN
FFD	FUNNEL FLOOR DRAIN
HD	HUB DRAIN
RD	ROOF DRAIN
RLD	R.L.AD DRAIN
AD	AREA DRAIN
BLAD	BI-LEVEL AREA DRAIN
CB	CATCH BASIN
	SANITARY TRAP
	ELBOW UP
	ELBOW DOWN
CO	WALL CLEANOUT
CO	FLOOR CLEANOUT
HB	HOSE BIBB
NFHB	NON-FREEZE HOSE BIBB
	GLOBE VALVE
	GATE VALVE
	BALL VALVE
	BUTTERFLY VALVE
	PRESSURE REDUCING VALVE
	CHECK VALVE
	CAP
	COMPRESSED AIR OUTLET
	BACKFLOW PREVENTER
	CIRCUIT BALANCING VALVE
	MULTIPLE PIPES / - - DENOTES NO. OF PIPES
T	THERMOMETER
	THERMOPOSTER
	3-WAY MODULATING VALVE
	3-WAY MODULATING VALVE
T	135°F(57°C) THERMOWELL C/W 1/2" BUSHING X 1/2" PLUG
	FLOOR ELEVATION ABOVE LEVEL
	FLOOR ELEVATION THIS LEVEL
	HEADROOM (FLOOR TO U/S HEIGHT)

2008/8	12	ISSUED FOR SITE INSTRUCTION #1-5	E.P.
08/8/8	11	ISSUED FOR SITE INSTRUCTION #1-1	E.P.
08-08/8	10	REVISED AS PER LEED COMMENTS	E.P.
08-04/8	9	ISSUED FOR SITE INSTRUCTION #1-8	E.P.
08/4/8	8	ISSUED FOR SITE INSTRUCTION #1-4	E.P.
08-07/8	7	ISSUED FOR CITY COMMENTS	E.P.
08/2/8	6	ISSUED FOR SITE INSTRUCTION #1-1	E.P.
08/03/4	5	ISSUED FOR TENDER	E.P.
07/08/4	4	RE-ISSUED FOR PERMIT	E.P.
08/08/4	3	ISSUED FOR PERMIT	E.P.
DATE	NO.	DESCRIPTION	BY

MARK VOID ALL PRINTS DATED PREVIOUS TO THE DATE ABOVE

REVISIONS

CONTRACTOR MUST CHECK AND VERIFY ALL DIMENSIONS AND CONDITIONS ON THE JOB AND REPORT DISCREPANCIES TO THE ENGINEERS BEFORE PROCEEDING WITH THE WORK. THIS DRAWING IS THE PROPERTY OF THE ENGINEERS AND MUST BE RETURNED UPON COMPLETION OF THE WORK.

DRAWINGS ARE NOT TO BE SCALED

NOVA TREND DEVELOPMENTS

175 West Beaver Creek Road, Unit 31
Richmond Hill, Ontario L4B 3M1
Tel: 905 882-5445
Fax: 905 882-5447

DRAWING TITLE
G/F SOUTH
HVAC DUCTWORK LAYOUT

PROJECT TITLE
50 ALEXANDRA PARK
BLOCK 11
38 CAMERON STREET
TORONTO ONTARIO

DESIGN BY:	CHECKED BY:	SCALE:
G.S.	E.P.	1:50
DATE:	PROJECT NUMBER:	DRAWING NUMBER:
FEB. 13	1313	M-6 OF 43

Drawing name: \\CADSERVER\Current Dwg\13\1313 - Alexandra Park\DWGS\1313M-6 - 2ND FLOR - 200mm & NORTH DUCTWORK.dwg Plotted: Oct 08, 2013 - 3:05pm